


GND CON		SHL-3188 [USAF]		Rwy	Knots	60	120	180	240	300	360										
127.25 335.5				14	ⓐ V/V(fpm)	300	600	900	1200	1500	1800										
SILVERBOW TOWER ★				32	ⓑ V/V(fpm)	265	530	795	1060	1325	1590										
124.75 257.95																					
NELLIS CONTROL																					
119.35 254.4																					
Minimum Climb Rate																					
ⓐ to 10,700																					
ⓑ to 5900																					

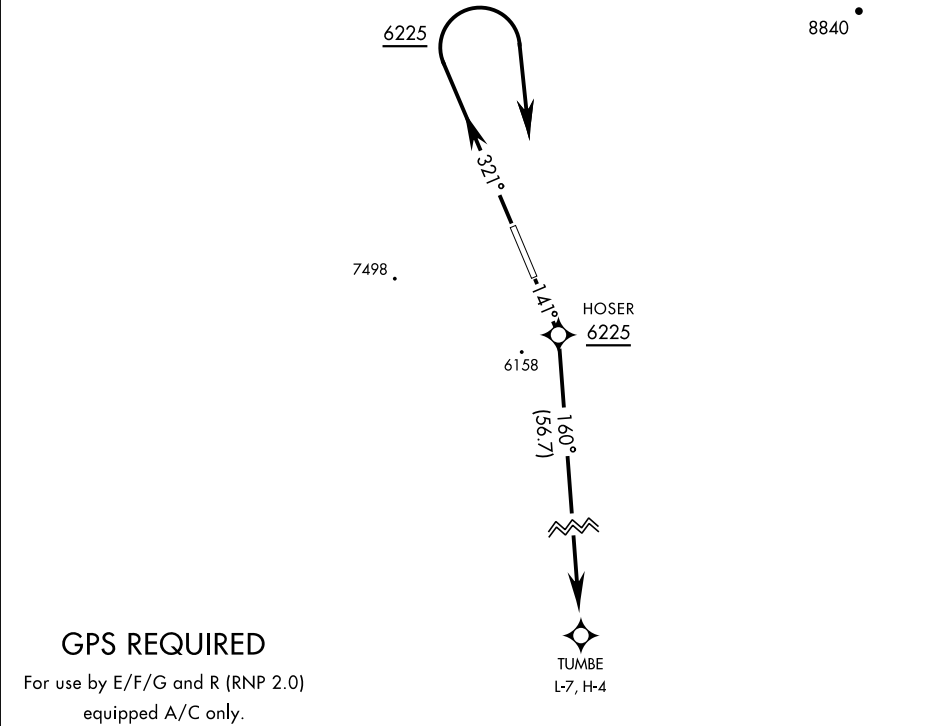

▼	DEPARTURE ROUTE DESCRIPTION
TAKE-OFF RWY 14: Fly heading 141°, at 6225 (HOSER) turn right direct TUMBE.	
TAKE-OFF RWY 32: Fly heading 321°, at 6225 turn right direct TUMBE.	