

LOC/DME I-TVI	APP CRS	Rwy Idg	5504
110.1	225°	TDZE	242
Chan 38		Aprt Elev	264

ILS or LOC RWY 22



THOMASVILLE RGNL (TVI)

ADF required. VDP NA with Valdosta altimeter setting. When local altimeter setting not received, use Valdosta altimeter setting and increase DA to 683 feet and all MDA 100 feet. Increase S-ILS 22 all Cats visibility ¾ SM, increase S-LOC 22 and Circling Cats C/D visibility ¼ SM. For inop ALS, increase S-ILS 22 all Cats, and S-LOC 22 Cat D visibility to 1 ½ SM. For inop ALS when using Valdosta altimeter setting, increase S-ILS 22 all Cats visibility to 1 ½ SM and increase S-LOC 22 Cat D visibility to 1 ¾ SM. Circling Rwy 4, 14, 32 NA at night.

MALSF

MISSED APPROACH:
Climb to 900 then climbing left turn to 2000 direct GTP NDB and hold.

AWOS-3PT	VALDOSTA APP CON*	UNICOM
119.175	126.6 285.6	123.075 (CTAF) 0

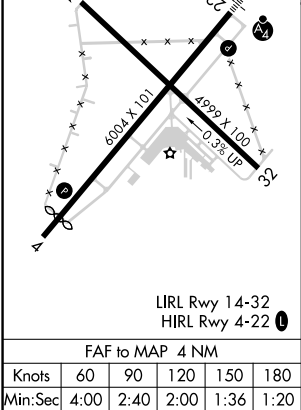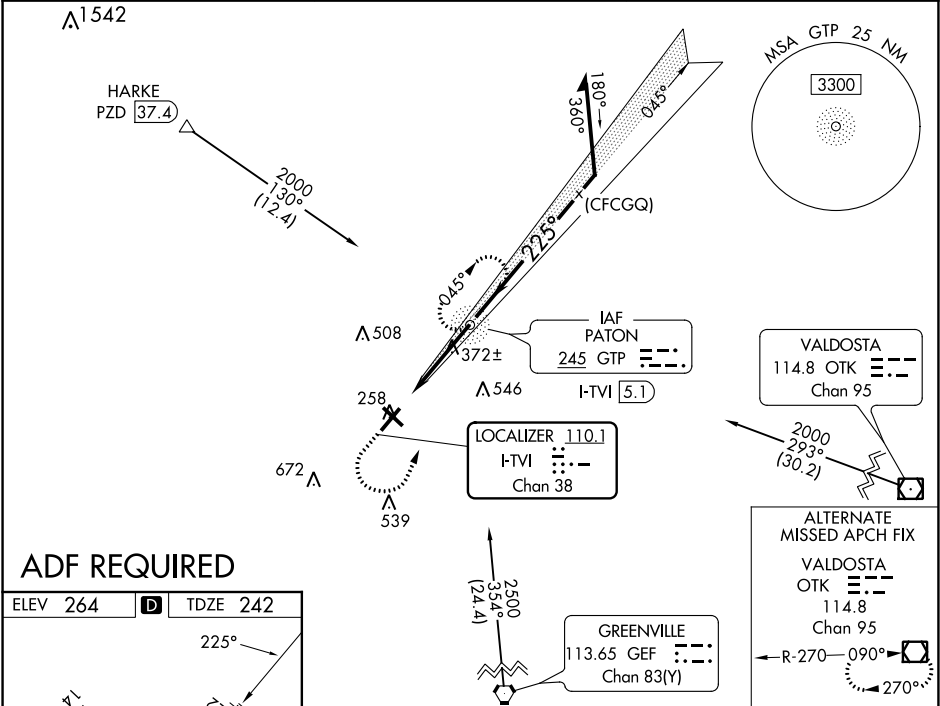

900		2000	GTP	GTP NDB	Remain within 10 NM	
I-TVI 1.2		I-TVI 2.3		I-TVI 5.1	045° 2000 225° 1600	
* LOC only.					GS 3.00° TCH 59	
1.1 NM		2.9 NM			GS unusable below 600.	
CATEGORY	A	B	C	D		
S-ILS 22	600-7/8		358 (400-7/8)			
S-LOC 22	640-3/4		398 (400-3/4)		640-7/8 398 (400-7/8)	
CIRCLING	700-1		800-1		900-1 3/4 1040-2 1/2	
	436 (500-1)		536 (600-1)		636 (700-1 3/4) 776 (800-2 1/2)	