

WAAS CH 86245 W13A	APP CRS 128°	Rwy Idg 9111 TDZE 115 Apt Elev 115
--	------------------------	---

RNAV (GPS) RWY 13

VICTORIA RGNL (VCT)


RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LPV Cat E and LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat E visibility to 1 SM.

MALSR

MISSED APPROACH:
Climb to 2200 direct
SEYOG and hold.

ATIS 119.025	HOUSTON CENTER 135.05 353.6	VICTORIA TOWER ★ 126.075 (CTAF) 257.95	GND CON 120.525 239.25	UNICOM 122.7
------------------------	---------------------------------------	--	----------------------------------	------------------------

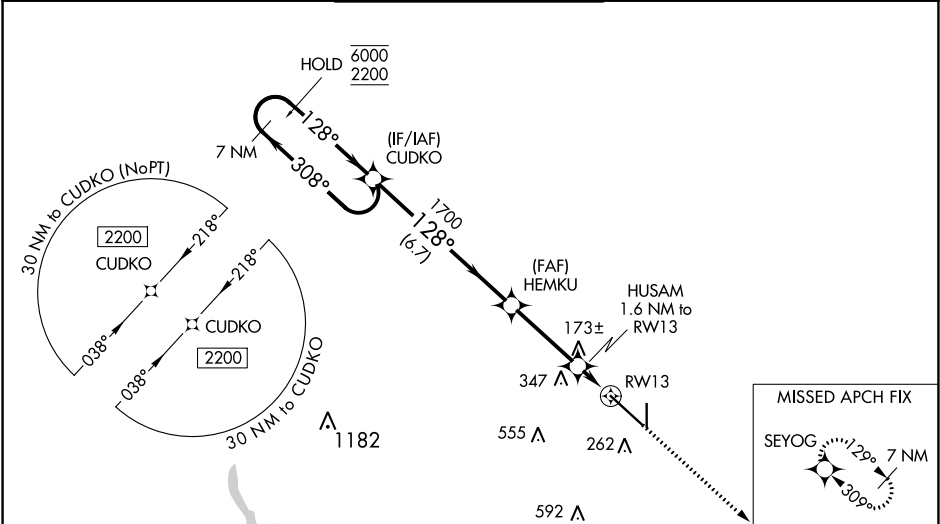

7 NM Holding Pattern		CUDKO		HEMKU		HUSAM 1.6 NM to RWY 13		2200 SEYOG	
6000 2200		308° 128°		128°		0.9 NM to RWY 13		128° to RWY 13	
GP 3.00° TCH 53		1700		660		RWY 13		9111 X 150	
6.7 NM		3.2 NM		0.7		0.9 NM		TWR 184	
CATEGORY	A	B	C	D	E				
LPV DA	315-½ 200 (200-½)								
LNAV/VNAV DA	365-½ 250 (300-½)								
LNAV MDA	440-½ 325 (400-½)								
CIRCLING	580-1	465 (500-1)	820-2 705 (800-2)	880-2 ½ 765 (800-2 ½)	NA	MIRL Rwy 18-36 REIL Rwy 18 and 36 HIRL Rwy 13-31			