

WAAS

CH **77614**

W01A

APP CRS

005°

Rwy Idg

4003

TDZE

410

Apt Elev

420


RNAV (GPS) RWY 1

WILLIAM M TUCK (W78)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).
⚠ DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Danville altimeter setting and increase LPV DA to 739 feet and LNAV/VNAV DA to 785 feet and all MDA 100 feet; increase LPV all Cats visibility ¼ mile and LNAV/VNAV all Cats visibility and Circling Cat C visibility ¼ mile and LNAV Cat C visibility ½ mile. Night landing: Rwy 19 NA. Baro-VNAV and VDP NA when using Danville altimeter setting. Circling NA to Rwys 6-24.

MISSED APPROACH:
Climbing right turn to 3000 direct HARVY and hold.

AWOS-3 119.425	WASHINGTON CENTER 124.05 352.0	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

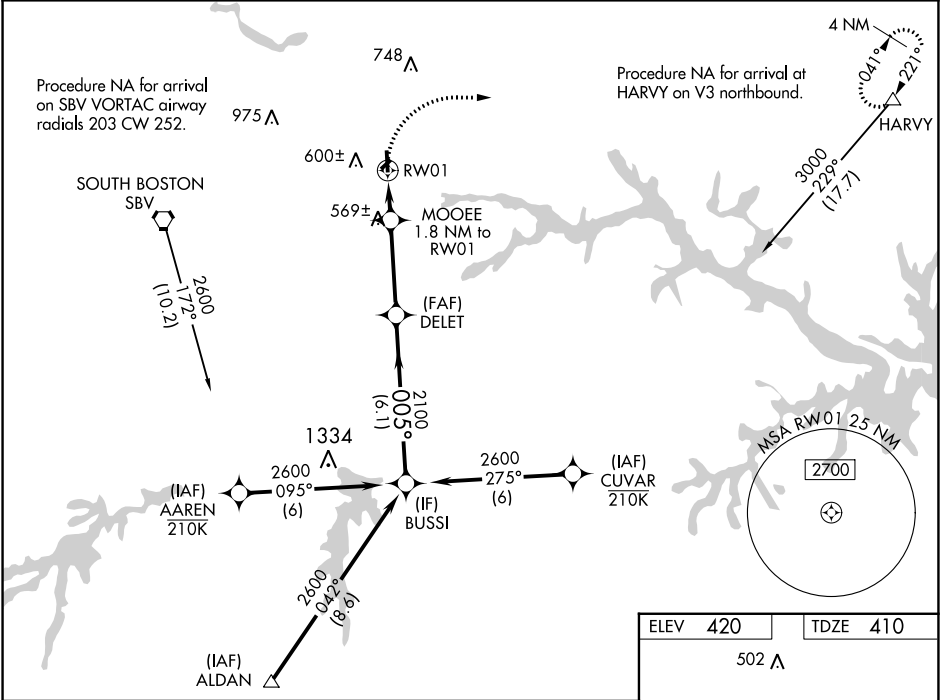

3000	HARVY	△
*LNAV only.	*1.2 NM to RW01	*1000
	MOOEE 1.8 NM to RW01	
	DELET 2100	
	BUSSI 2600	
	005°	
	2100	
	GP 3.00°	TCH 59
	1.2 NM	0.6 NM
	3.4 NM	6.1 NM
CATEGORY	A	B
LPV DA	660-1	250 (300-1)
LNAV/VNAV DA	706-1	296 (300-1)
LNAV MDA	820-1	410 (400-1)
CIRCLING	960-1	540 (600-1)

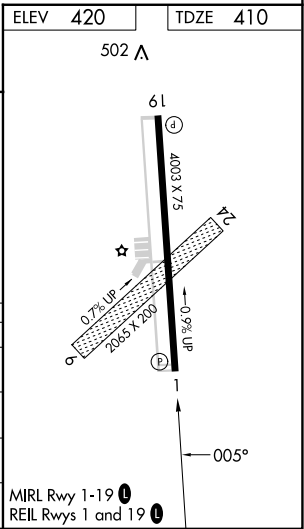




VORTAC SBV	APP CRS	Rwy Idg	N/A
110.4	081°	TDZE	N/A
Chan 41		Apt Elev	420

VOR-A

WILLIAM M TUCK (W78)

V A Night landing: Rwy 19 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Danville altimeter setting and increase all MDA 80 feet; increase all Cats visibility and DICYE fix minimums Cat C visibility ¼ mile. Circling NA to Rwy 6-24.	MISSED APPROACH: Climbing left turn to 3000 direct SBV VORTAC and hold.
---	--

AWOS-3 119.425	WASHINGTON CENTER 124.05 352.0	UNICOM 122.8 (CTAF) 0
-------------------	-----------------------------------	---------------------------------

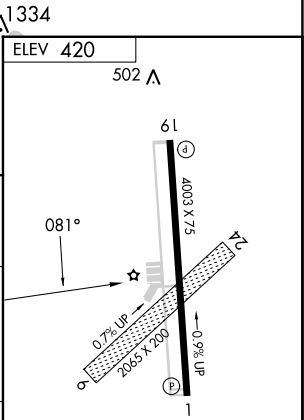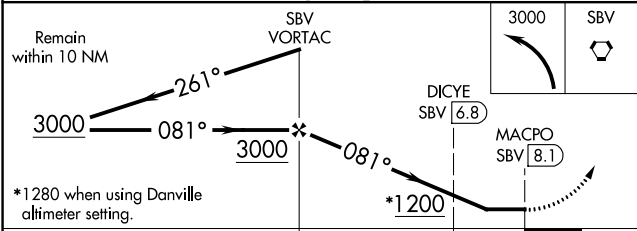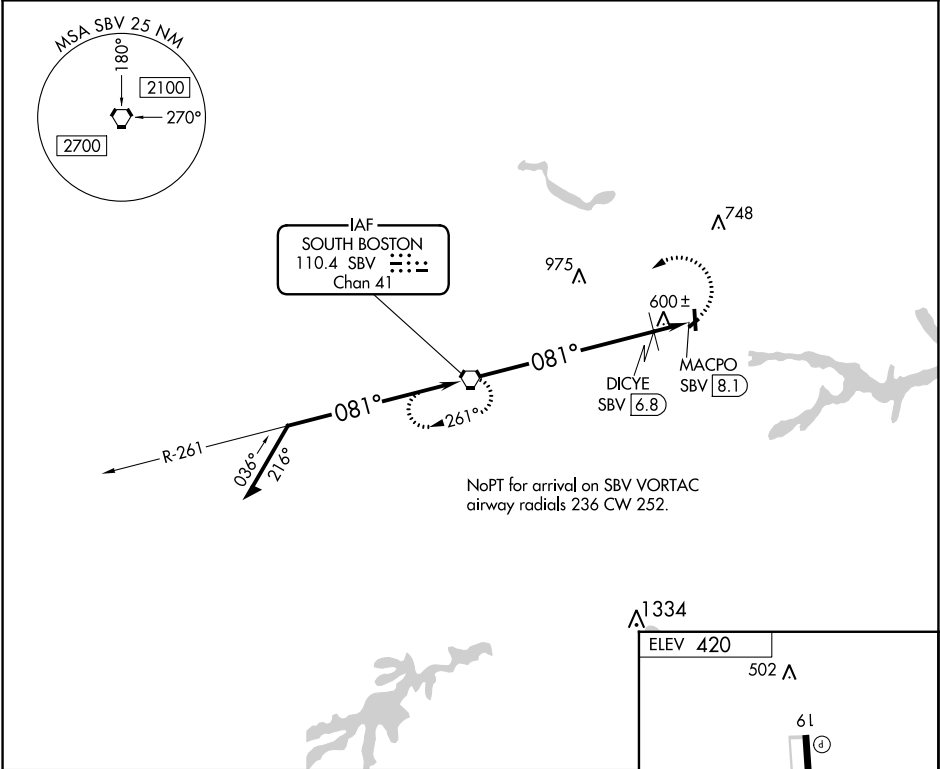

		6.8 NM		1.3 NM				1			
CATEGORY	A	B	C	D		MIRL Rwy 1-19 0 REIL Rws 1 and 19 0					
C CIRCLING	1200-1	780 (800-1)	1200-2¼ 780 (800-2¼)	NA							
DICYE FIX MINIMUMS						FAF to MAP 8.1 NM					
C CIRCLING	960-1	540 (600-1)	1060-1¾ 640 (700-1¾)	NA		Knots	60	90	120	150	180
						Min:Sec	8:06	5:24	4:03	3:14	2:42

VOR-A

NE-3, 22 FEB 2024 to 21 MAR 2024

NE-3, 22 FEB 2024 to 21 MAR 2024