

WAAS CH 70614 W17A	APP CRS 172°	Rwy Idg 5502 TDZE 2176 Apt Elev 2189
--	------------------------	---

RNAV (GPS) RWY 17

RNP APCH.


⚠ Baro-VNAV and VDP NA when using Gage altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use Gage altimeter setting and increase all DA/MDA 40 feet. Inop table does not apply. Circling Rwy 5, 23 NA at night.

ODALS



MISSED APPROACH:
Climb to 4500 direct
TISSY and hold.

AWOS-3 118.425	KANSAS CITY CENTER 126.95 379.2	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

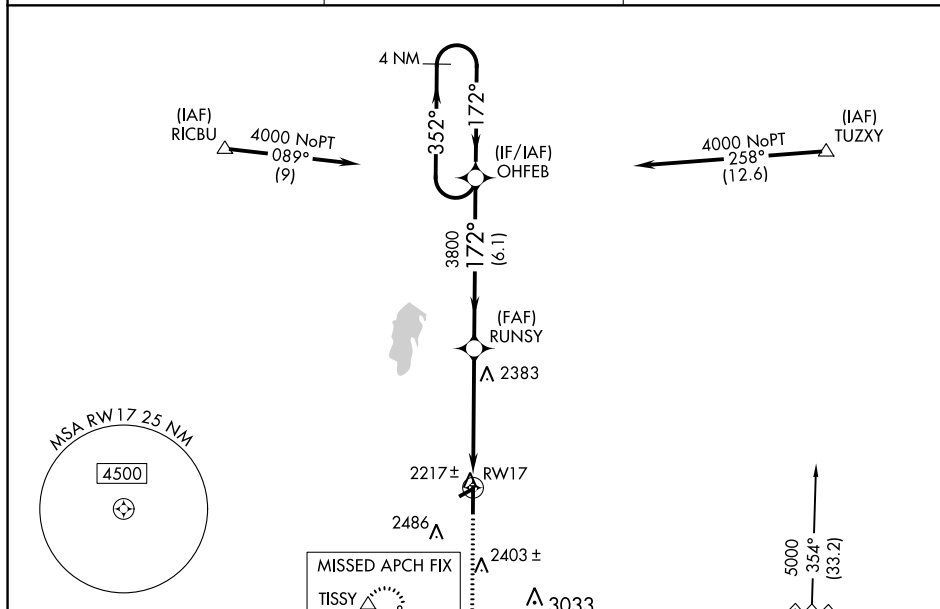

ILS Frequencies

Category	A	B	C	D
LPV DA	2426-1	250 (300-1)		
LNAV/VNAV DA	2572-1½	396 (400-1½)		
LNAV MDA	2700-1	524 (600-1)	2700-1½ 524 (600-1½)	2700-1¾ 524 (600-1¾)
CIRCLING	2700-1 511 (600-1)	2860-1 671 (700-1)	2940-2¼ 751 (800-2¼)	2960-2½ 771 (800-2½)