


LOC I-LOW	APP CRS	Rwy Idg	8400
110.7	012°	TDZE	6649
		Apt Elev	6649


ILS or LOC RWY 1
YELLOWSTONE (WYS)

ADF required. DME required for MUPDE stepdown fix.		MALSR	MISSED APPROACH: Climb to 9000, then climbing right turn to 10100 direct TARGY LOM and hold.
NA -20°C Obtain local altimeter setting on CTAF, when not received procedure NA. Inoperative table does not apply to S-LOC 1 Cat A. For inoperative MALSR, increase S-ILS 1 all Cats visibility to 2 3/4 mile.			

AWOS-3P	SALT LAKE CENTER	UNICOM
118.1	132.4 338.3	123.0 (CTAF) 0

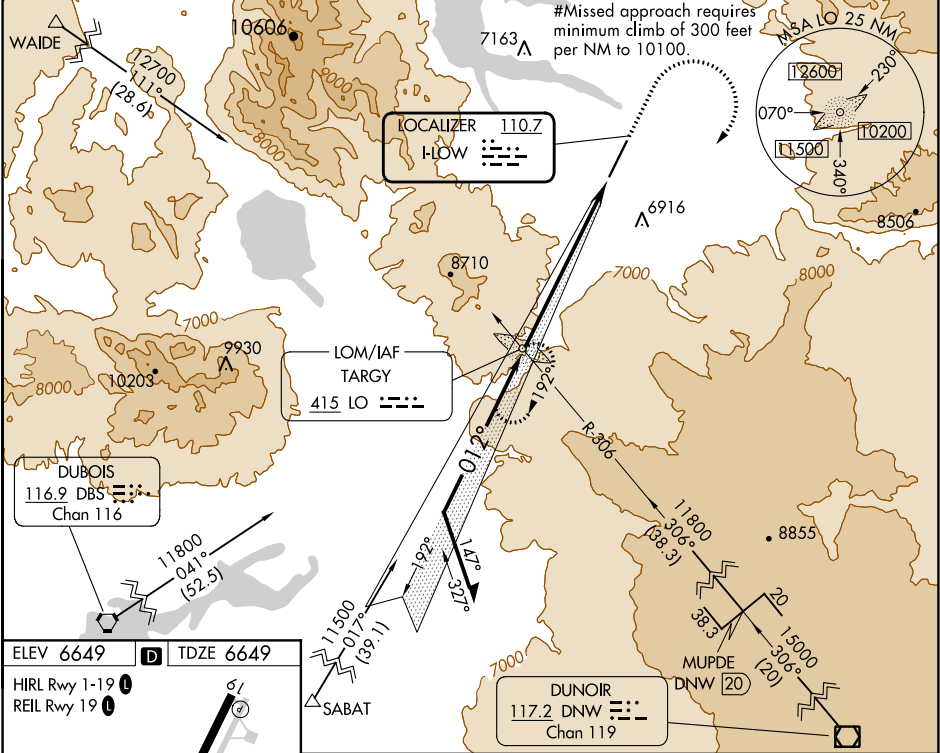

ELEV 6649	D	TDZE 6649
HIRL Rwy 1-19		
REIL Rwy 19		

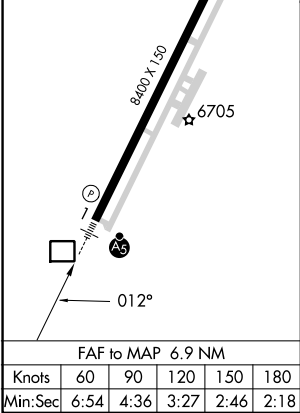

Remain within 10 NM		LO LOM	9000	10100	TARGY
10100		192°	8941		
GS 3.00° TCH 50		012°	9600	*9000	
VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 50).					
6.9 NM					
CATEGORY	A	B	C	D	
S-ILS 1#		6849-1/2	200 (200-1/2)		
S-ILS 1		7449-2 1/4	800 (800-2 1/4)		
S-LOC 1	7780-1 1/4 1131 (1200-1 1/4)	7780-1 1131 (1200-1)	7780-2 1/2 1131 (1200-2 1/2)		
CIRCLING	7780-1 1/4 1131 (1200-1 1/4)	7780-1 1/2 1131 (1200-1 1/2)	7780-3 1131 (1200-3)	8020-3 1371 (1400-3)	