

WAAS CH 82730 W04A	APP CRS 038°	Rwy Idg TDZE 1076 Apt Elev 1076
--	------------------------	---

RNAV (GPS) RWY 4


MOOSE LAKE CARLTON COUNTY (MZH)

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Straight-in minimums NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Baro-VNAV NA when using Cloquet altimeter setting. When local altimeter setting not received, use Cloquet altimeter setting and increase all DA 77 feet and all MDA 80 feet; increase LPV all Cats visibility 1/8 mile and LNAV/VNAV all Cats visibility 3/8 mile.

MISSED APPROACH: Climb to 4000 direct YISTU and hold.

AWOS-3 119.125	DULUTH APP CON 125.45 233.7	CTAF 122.9 0
--------------------------	---------------------------------------	------------------------

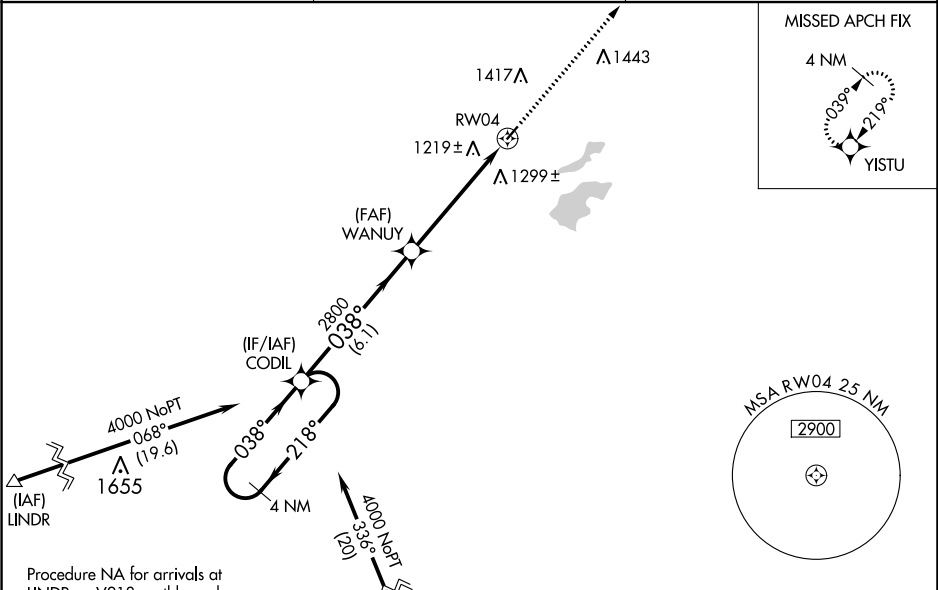

ELEV 1076		TDZE 1076	
4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).	
4000		YISTU	
GP 3.00°		TCH 40	
218°		038°	
038°		038°	
2800		2800	
6.1 NM		5.3 NM	
CATEGORY	A	B	C
LPV DA	1326-1	250 (300-1)	NA
LNAV/VNAV DA	1529-1½	453 (500-1½)	NA
LNAV MDA	1560-1	484 (500-1)	NA
CIRCLING	1660-1	1740-1	NA
	584 (600-1)	664 (700-1)	
REIL Rwy 4 and 22		MIRL Rwy 4-22	