

LOC I-VDI	APP CRS	Rwy Idg	6002
110.3	249°	TDZE	273
		Apt Elev	274



ILS or LOC RWY 25
VIDALIA RGNL (VDI)

⚠ When local altimeter setting not received, use Baxley altimeter setting and increase all DAs 77 feet and all MDAs 80 feet, increase S-LOC 25 Cat C/D visibility ¼ mile, Circling Cat C/D visibility ¼ mile. For inop MALSR, increase S-LOC 25 Cat C/D visibility to 1¾ mile. For inop MALSR, when using Baxley altimeter setting increase S-ILS 25 all Cats visibility to ¾ mile. Night landing Rwy 32 NA. ADF required.


MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 2000 direct UQN NDB and hold.

AWOS-3 119.925	JACKSONVILLE CENTER 127.575 269.025	UNICOM 122.8 (CTAF) 📻
-------------------	--	---------------------------------

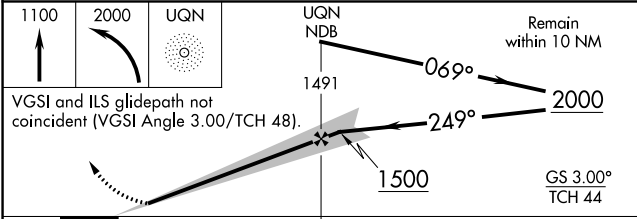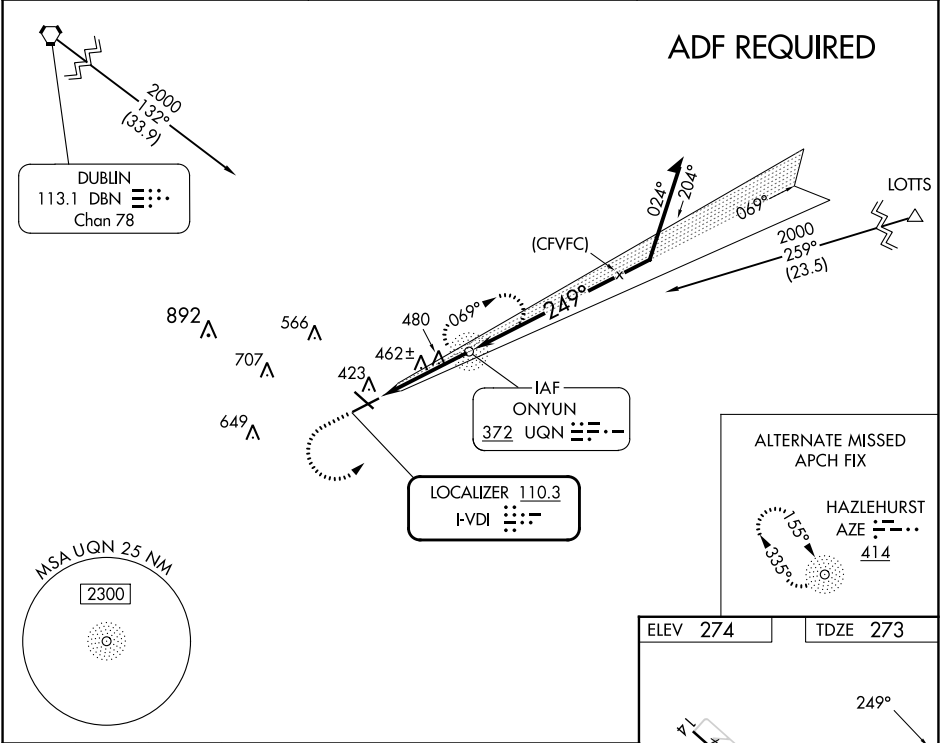

CATEGORY	A	B	C	D
S-ILS 25	473-½ 200 (200-½)			
S-LOC 25	740-½ 467 (500-½)	740-1 467 (500-1)		
C CIRCLING	740-1 466 (500-1)	920-1¾ 646 (700-1¾)	1060-2½ 786 (800-2½)	



ELEV 274	TDZE 273
HIRL Rwy 7-25 📻 REIL Rwy 7 📻	
FAF to MAP 3.7 NM	
Knots	60 90 120 150 180
Min:Sec	3:42 2:28 1:51 1:29 1:14

SE-4, 22 FEB 2024 to 21 MAR 2024

SE-4, 22 FEB 2024 to 21 MAR 2024