


LOC I-EEZ 110.5	APP CRS 315°	Rwy Idg TDZE Apt Elev 5099 1423 1425
---------------------------	------------------------	--

ILS or LOC RWY 31


CHANDLER FLD (AXN)

▼ ▲NA Inoperative table does not apply to S-LOC 31 Category C.	ODALS MISSED APPROACH: Climb to 2500 then climbing right turn to 3500 direct AXN VOR/DME and hold.
---	--

ASOS 118.375	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

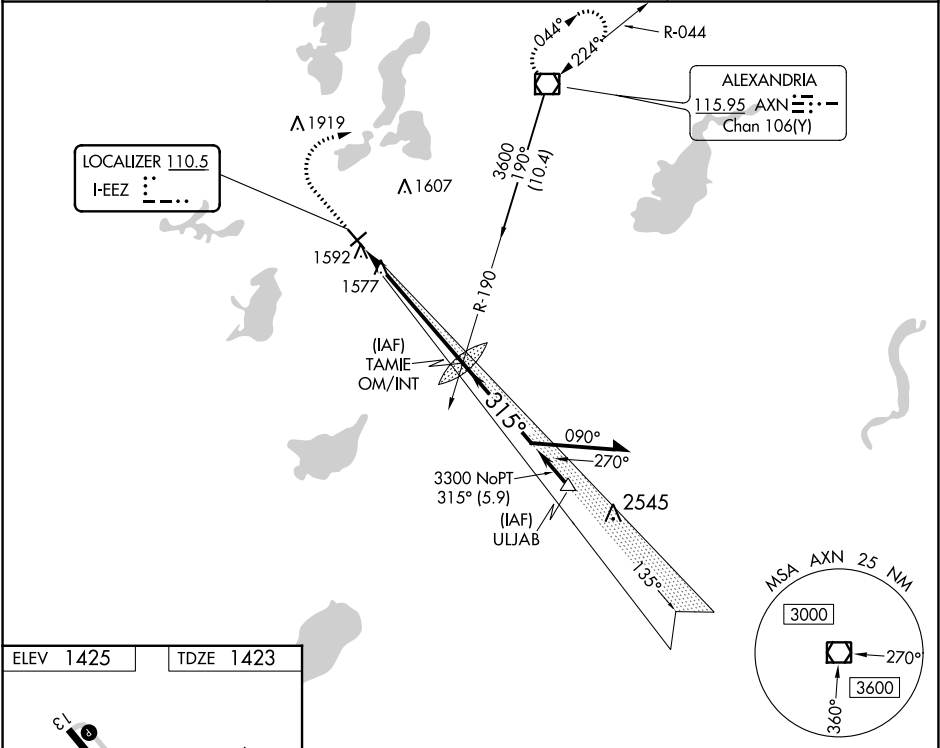

ELEV 1425	TDZE 1423
-----------	-----------

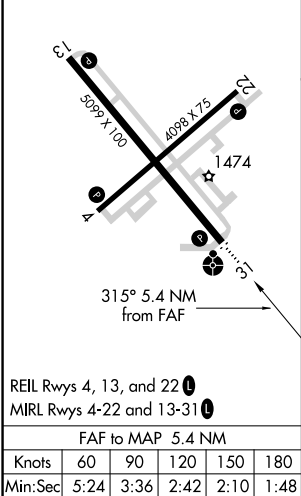

REIL Rwy 4, 13, and 22
MIRL Rwy 4-22 and 13-31

FAF to MAP 5.4 NM					
Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

	2500	3500	AXN	
				TAMIE OM/INT
				3210
				135°
				3600
				315°
				3300
				GS 3.00°
				TCH 49
				5.4 NM
CATEGORY	A	B	C	D
S-ILS 31	1673-¾ 250 (300-¾)			
S-LOC 31	1840-¾ 417 (500-¾)		1840-1¼ 417 (500-1¼)	
CIRCLING	1920-1 495 (500-1)		1940-1½ 515 (600-1½)	
			2000-2 575 (600-2)	