

WAAS
CH **82209**
W17A

APP CRS
172°

Rwy Idg
TDZE **5491**
Apt Elev **5515**

RNAV (GPS) RWY 17

COLORADO AIR AND SPACE PORT (CFO)

RNP APCH-GPS.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 48°C.

MISSED APPROACH: Climb to 8500 direct VIBPU and on track 160° to HUNTN and hold.

ATIS
119.025

DENVER APP CON
128.25 371.95


SPACE PORT TOWER ★
120.2 (CTAF) 0

GND CON
124.7

CLNC DEL
124.7

CLNC DEL
121.75
(When twr closed)

UNICOM
122.95

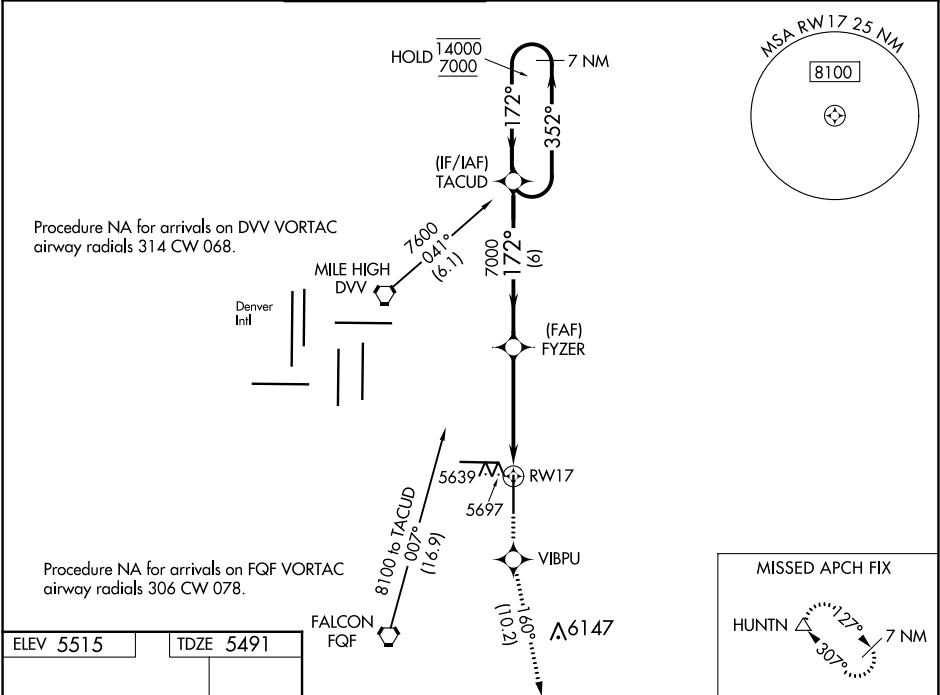

ELEV 5515	TDZE 5491				
172° 0.5% UP 0.4% DOWN 8002 X 100 Δ 5559 ± 21 0.5% UP 0.5% DOWN 8000 X 100 35 TWR 5687 REIL Rws 8 and 17 HIRL Rwy 8-26 MIRL Rwy 17-35		7 NM Holding Pattern TACUD FYZER 7000 8500 VIBPU tr 160° HUNTN *1.5 NM to RW17 *LNAV only GP 3.00° TCH 55 6 NM 3.1 NM 1.5 NM RW17			
CATEGORY	A	B	C	D	
LPV DA	5691- ³ / ₄ 200 (200- ³ / ₄)				
LNAV/VNAV DA	5916-1 ³ / ₈ 425 (500-1 ³ / ₈)				
LNAV MDA	6000-1 509 (500-1)		6000-1 ¹ / ₂ 509 (500-1 ¹ / ₂)		
CIRCLING	6000-1 485 (500-1)		6100-1 ¹ / ₂ 585 (600-1 ¹ / ₂)		6300-2 ¹ / ₂ 785 (800-2 ¹ / ₂)