LOC/DME I-FYJ	APP CRS	Rwy Idg	5000
109.55	094°	TDZE	14
Chan 32 (Y)		Apt Elev	20

LOC RWY 10

MIDDLE PENINSULA RGNL (FYJ)

T A NA When local altimeter setting not received, use Newport News altimeter setting and increase all MDA 80 feet and increase S-10 Cat B and Circling Cat B visibility ¼ SM. VDP NA when using Newport News altimeter setting.

MISSED APPROACH: Climb to 500 then climbing right turn to 2000 direct HCM VORTAC and hold, continue climb-in-hold to 2000.

AWOS-3	POTOMAC APP CON	UNICOM
132.825	126.4 282.375	123.0 (CTAF) L

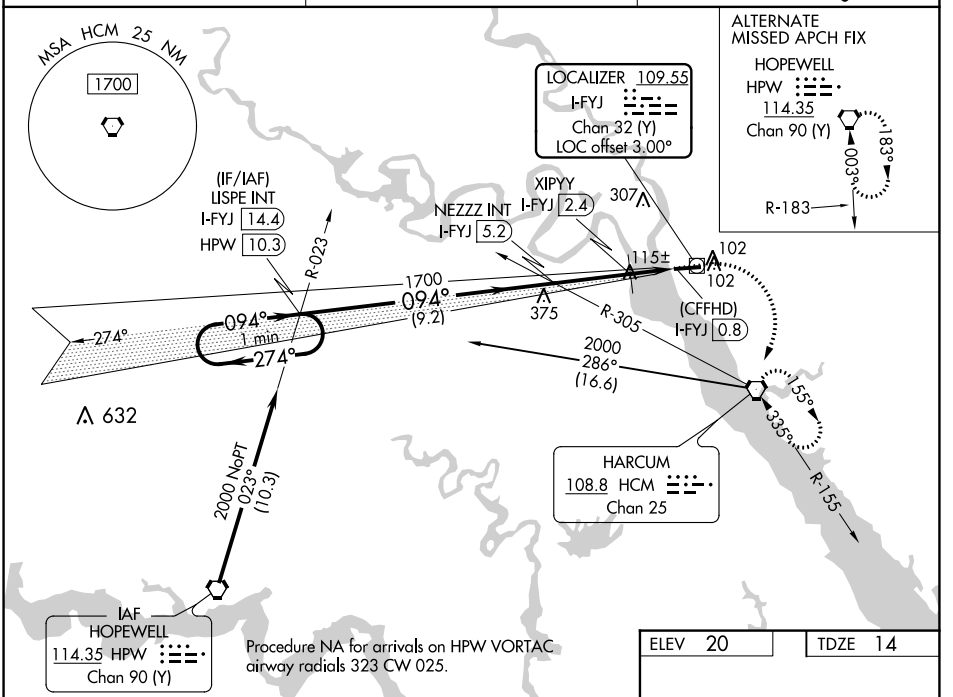

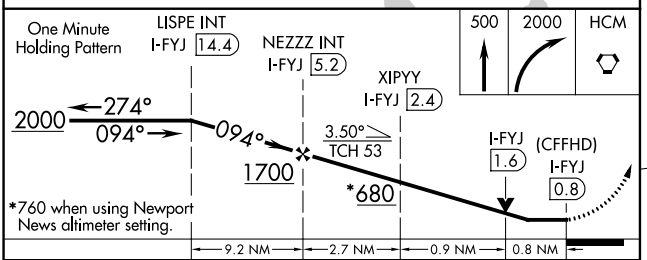



CATEGORY	A	B	C	D
S-10	680-1	666 (700-1)	NA	
C CIRCLING	680-1	660 (700-1)	NA	
XIPYY FIX MINIMUMS				
S-10	380-1	366 (400-1)	NA	
C CIRCLING	480-1 460 (500-1)	620-1 600 (600-1)	NA	

MIRL Rwy 10-28 L
REIL Rwys 10 and 28 L

FAF to MAP 4.4 NM					
Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28

NE-3, 22 FEB 2024 to 21 MAR 2024
NE-3, 22 FEB 2024 to 21 MAR 2024

WAAS	APP CRS	Rwy Idg	5000
Ch 40317	097°	TDZE	14
W10A		Apt Elev	20

RNAV (GPS) RWY 10
MIDDLE PENINSULA RGNL (FYJ)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Newport News altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Newport News altimeter setting: increase LPV DA to 329 feet; increase LNAV/VNAV DA to 420 feet and Cats A/B visibility ¼ SM; increase all MDA 80 feet.

MISSED APPROACH: Climb to 2000 direct CIBAC and on track 147° to JUDLU and hold.

AWOS-3	POTOMAC APP CON	UNICOM
132.825	126.4 282.375	123.0 (CTAF) L

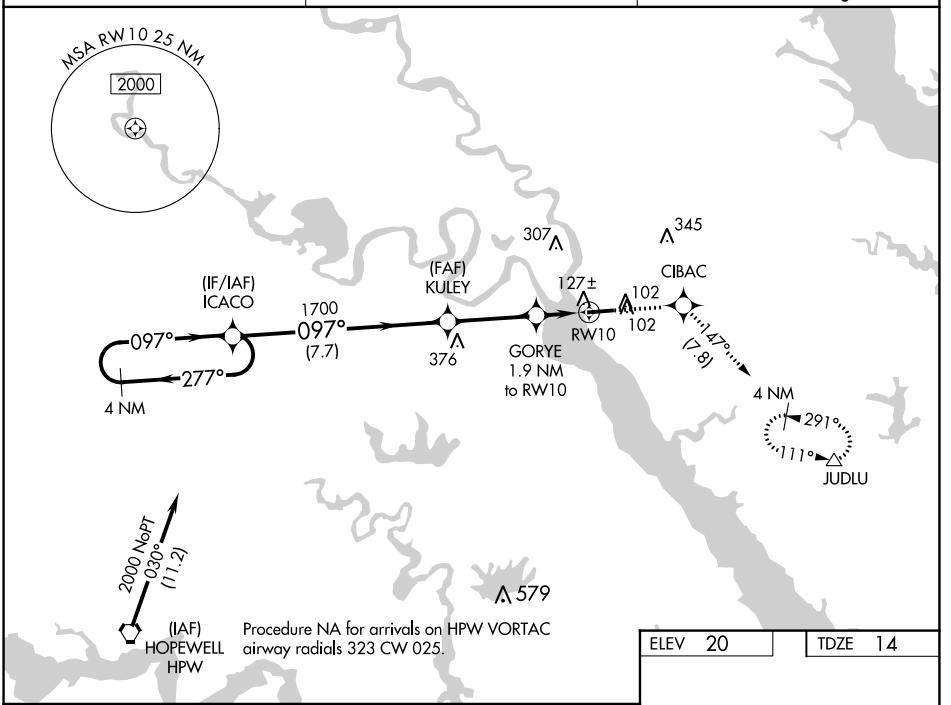

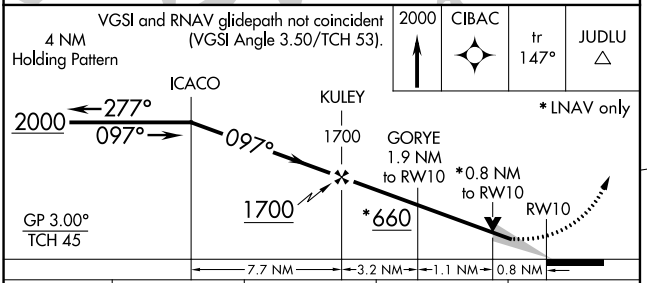

CATEGORY	A	B	C	D
LPV DA	264-1	250 (300-1)	NA	
LNAV/VNAV DA	355-1¼	341 (400-1¼)	NA	
LNAV MDA	380-1	366 (400-1)	NA	
C CIRCLING	480-1 460 (500-1)	620-1 600 (600-1)	NA	

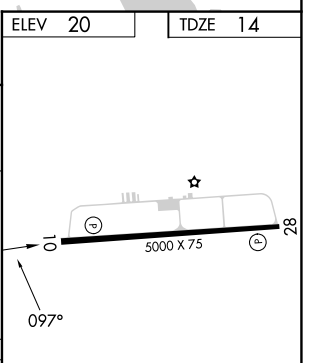

MIRL Rwy 10-28 L
REIL Rwys 10 and 28 L

NE-3, 22 FEB 2024 to 21 MAR 2024
NE-3, 22 FEB 2024 to 21 MAR 2024

APP CRS	Rwy Idg	N/A
277°	TDZE	N/A
	Apt Elev	20

RNAV (GPS)-B

MIDDLE PENINSULA RGNL (FYJ)

RNP APCH.

MISSED APPROACH: Climb to 2000 direct ICACO and hold.

AWOS-3	POTOMAC APP CON	UNICOM
132.825	126.4 282.375	123.0 (CTAF) L

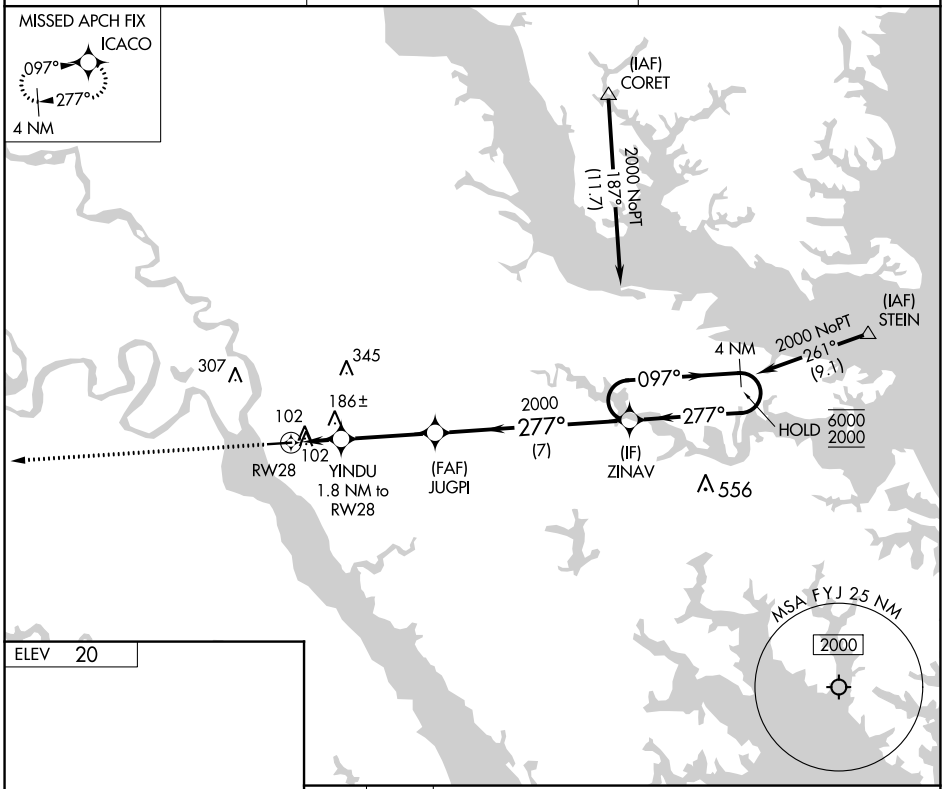

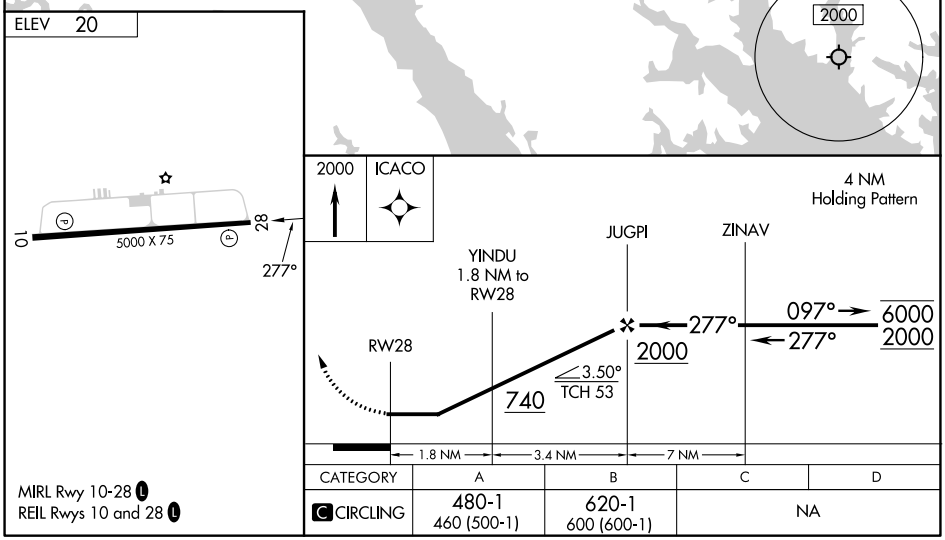

MIRL Rwy 10-28 L
REIL Rwys 10 and 28 L

CATEGORY	A	B	C	D
C CIRCLING	480-1 460 (500-1)	620-1 600 (600-1)	NA	

NE-3, 22 FEB 2024 to 21 MAR 2024

VORTAC HCM	APP CRS	Rwy Idg	N/A
108.8	337°	TDZE	N/A
Chan 25		Apt Elev	20

VOR-A

MIDDLE PENINSULA RGNL (FYJ)

When local altimeter setting not received, use Newport News altimeter setting and increase all MDA 80 feet.

MISSED APPROACH: Climbing right turn to 1700 direct HCM VORTAC and hold.

AWOS-3	POTOMAC APP CON	UNICOM
132.825	126.4 282.375	123.0 (CTAF) L

NE-3, 22 FEB 2024 to 21 MAR 2024

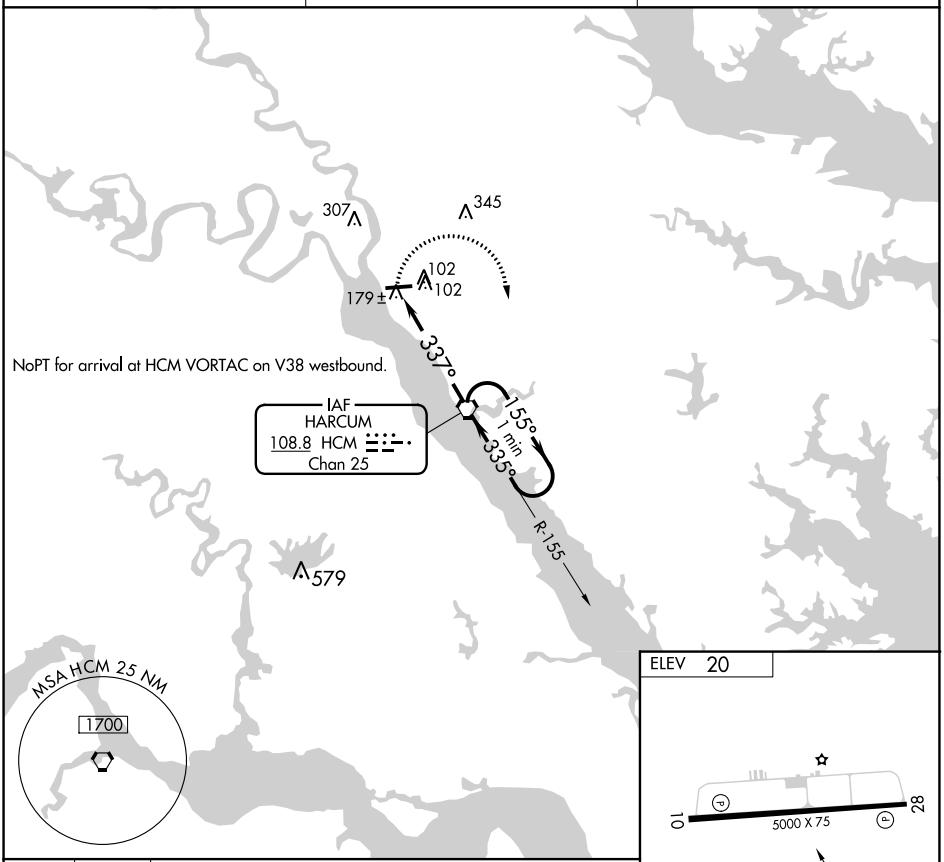

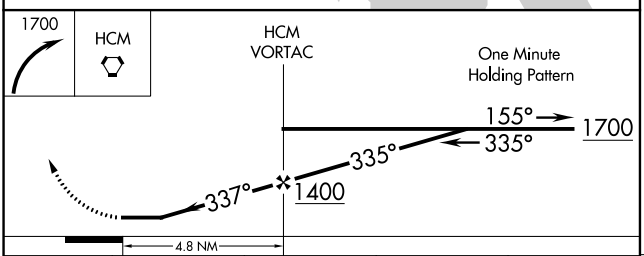

CATEGORY	A	B	C	D
C CIRCLING	480-1 460 (500-1)	620-1 600 (600-1)	NA	

FAF to MAP 4.8 NM					
Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36