

WAAS CH 82020 W35A	APP CRS 352°	Rwy Idg 4201 TDZE 2012 Apt Elev 2012
--	------------------------	---


RNAV (GPS) RWY 35
LARNED-PAWNEE COUNTY (LQR)

RNP APCH.

▼ Baro-VNAV NA when using Great Bend altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Rwy 35 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Great Bend altimeter setting and increase all DA 49 feet and LNAV/VNAV all Cats visibility $\frac{1}{8}$ SM; increase all MDA 60 feet and increase LNAV Cat C and Circling Cat C visibility $\frac{1}{4}$ SM. Circling NA to Rwy 4, 12, 22 and 30. Procedure NA at night.

MISSED APPROACH:
Climb to 4500 direct
CULMI and hold.

AWOS-2 119.875	KANSAS CITY CENTER 124.4 322.4	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

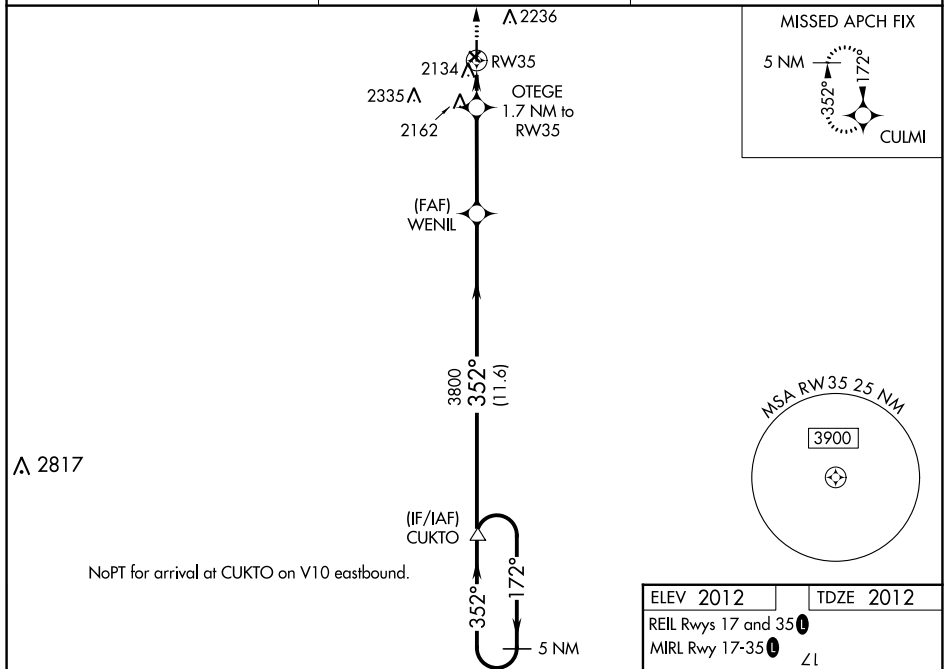

CATEGORY	A	B	C	D
LPV DA	2262-1	250 (300-1)		NA
RNAV/VNAV DA	2337-1½	325 (400-1½)		NA
RNAV MDA	2420-1	408 (500-1)	2420-1½ 408 (500-1½)	NA
CIRCLING	2500-1 488 (500-1)	2600-1 588 (600-1)	2640-1¼ 628 (700-1¼)	NA

