


ILS/DME I-PBI 111.9 Chan 56	APP CRS 099°	Rwy Idg 8151 TDZE 16 Apt Elev 20	ILS or LOC RWY 10L PALM BEACH INTL (PBI)
---	------------------------	---	---

DME required. RNP APCH-GPS. From GULLO.	MALSR 	MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 on heading 323° and PBI VORTAC R-343 to MORGA/PBI 17.8 DME and hold.
For inop ALS, increase S-LOC 10L Cat C/D visibility to RVR 5500. * RVR 1800 authorized with use of FD or AP or HUD to DA.		

D-ATIS 123.75	PALM BEACH APP CON 128.3 317.4	PALM BEACH TOWER 119.1 257.8	GND CON 121.9 284.6	CLNC DEL 121.6 284.6	CPDLC
-------------------------	--	--	-------------------------------	--------------------------------	-------

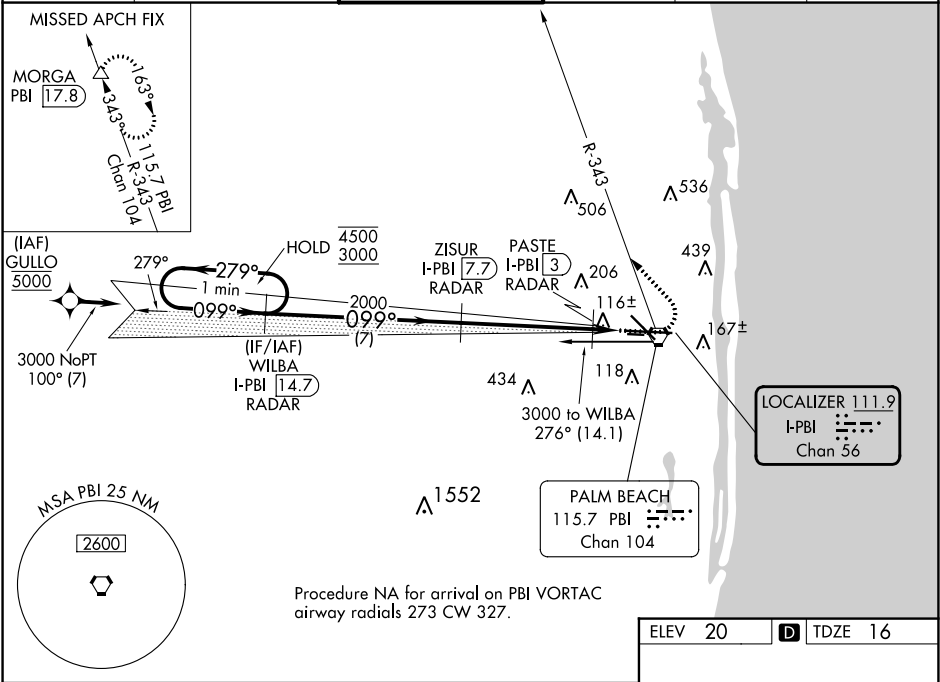

VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 68).		1000	3000	PBI	MORGA
One Minute Holding Pattern		↑	hdg 323°	△	△
4500 ← 279° 3000 → 099°		WILBA I-PBI 14.7 RADAR			
2000		ZISUR I-PBI 7.7 RADAR			
500		PASTE I-PBI 3 RADAR			
GS 3.00° TCH 52		I-PBI 1.6			
7 NM		4.7 NM		1.4 NM	
CATEGORY	A	B	C	D	
S-ILS 10L *	216/24 200 (200-½)				
S-LOC 10L	380/24 364 (400-½)		380/35 364 (400-⅝)		
CIRCLING	560-1 540 (600-1)		740-2 780-2½ 720 (800-2) 760 (800-2½)		

HIRL Rwy 10L-28R
REIL Rwys 10R, 14, 28L, 28R and 32
MIRL Rwys 14-32 and 10R-28L