



WAAS CH 82418 W18A	APP CRS 186°	Rwy Idg TDZE Apt Elev	5700 6763 6763
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18
PANGUITCH MUNI (U55)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C (-18°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Bryce Canyon altimeter setting and increase all DA 149 feet and all MDA 160 feet, increase LPV visibility ¼ mile and increase LNAV visibility and Circling Cat B visibility ¼ mile. Baro-VNAV and VDP NA with Bryce Canyon altimeter setting.

⚠ MISSED APPROACH: Climb to 12500 direct OPOYA and on track 216° to POBME and hold, continue climb-in-hold 12500.

AWOS-3 133.125	SALT LAKE CENTER 133.6 269.25	CTAF 122.9
--------------------------	---	----------------------

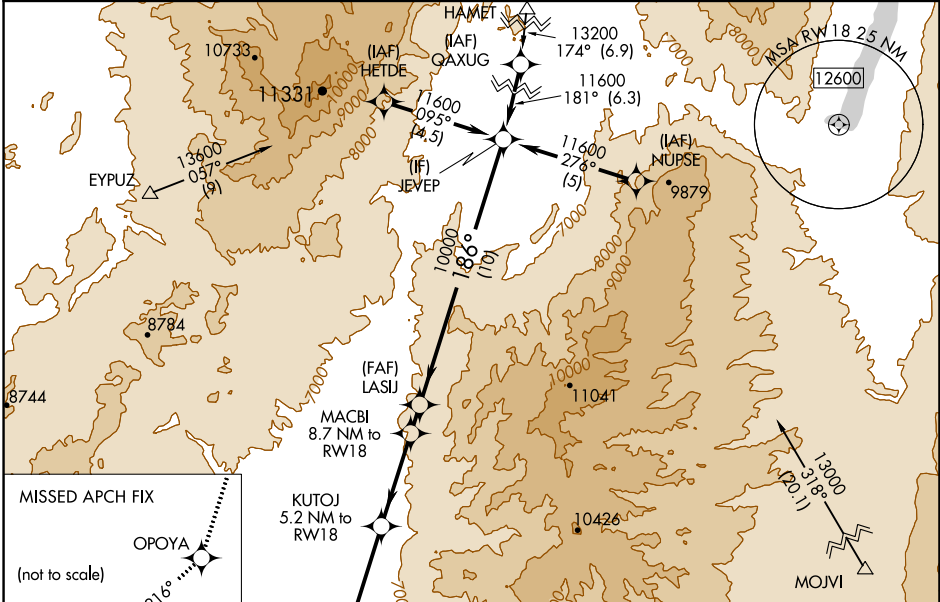

ELEV 6763	TDZE 6763
186° to RWY 18	

12500 OPOYA tr 216° POBME

*LNAV only.

RWY 18

*2.1 NM to RWY 18

KUTOJ 5.2 NM to RWY 18

MACBI 8.7 NM to RWY 18

LASU 10000

JEVEP 11600

Procedure Turn NA

GP 3.00° TCH 40

8460*

9600*

10000

2.1 NM 3.1 NM 3.5 NM 1.1 NM 10 NM

CATEGORY	A	B	C	D
LPV DA	6963-1	200 (200-1)	NA	NA
LNAV/VNAV DA	7331-2	568 (600-2)	NA	NA
LNAV MDA	7460-1	697 (700-1)	NA	NA
CIRCLING	7460-1	697 (700-1)	NA	NA

